



HEADQUARTERS

TAIWAN
SANYANG MOTOR Co., Ltd.
3 Chung Hua Road, Hukou
Hsinchu, Taiwan R.O.C.
T: +886 3 5981911
F: +886 3 5970880
W: www.sym-global.com

The information in this brochure may differ from
the available models.
See your SYM dealers for more details.



Website



Catalogue

2026 COLLECTION

2026 COLLECTION

START YOUR MILES





QUALITY

Taking punctuality, quality and precision as the standard of every task and result.

INNOVATION

Combining continuous improvement, new thinking and new technology to increase competitiveness.

PROFESSIONALISM

Facilitating refined expertise and optimizing customers' experience to enhance brand satisfaction.

OUR BRAND VALUE

ICON INDEX

SYM



Zero-Resistance Starter & Generator System

The alternator directly drives the crankshaft to start the engine, so the vehicle can be started smoothly and quietly.



LED Optical Film Tail Light

The light-transmitting film is adopted between the LED light source and the outer lens. The particles on the film make the special effect on the tail light.



Advanced Brake Light

Braking suddenly will cause the brake light flashes automatically to warn the vehicles behind.



Anti-Lift Engine Hanger System

A.L.E.H is the special engine hanger system which improves the riding stability while opening throttle.



2-in-1 Parking Brake System

The 2-in-1 side stand combines the parking brake function. Kicking down the side stand to apply the brake. Get your parking easily with no hassle.



Enhanced Multi-Ignition System

EnMIS optimizes fuel consumption and power output by adopting either unified or separate ignition strategy.

ENGINE



Twin-Cylinder Engine



Centrifugal Wet Clutch



Start & Stop



Liquid-Cooled Engine



Double Overhead Camshaft



Ride Modes



Hyper Variable Inlet Valve System



Ride-by-Wire System



Cruise Control

FRAME



LED Light



Motorbike-Type Engine Mounting



Keyless



In-Vehicle Infotainment System



Camcorder Installation Hole



USB Type-C Charging Port



Hazard Control Light



Adjustable Waistrest



2 Helmets Storage



Tool-Free Adjustable Windshield



Adjustable Windshield



Electric Adjustable Windshield



Heated Grips



Inertial Measurement Unit



TFT Instrument



LCD Instrument



LED Instrument



Upside-Down Fork



Dual Triple Clamp



Adjustable Rear Suspension



Multi-Link Mono-Shock Absorber




Anti-Lock Braking System




Combined Braking System




Off-Road ABS



Traction Control System



Cornering ABS



Cornering TCS



Cornering Light



CRUISER

TTLBT 508	09 - 12
MAXSYM TL 508	13 - 14
MAXSYM GT 400	15 - 16
CRUiSYM 400	17 - 18
CRUiSYM 125/300	19 - 20
JOYMAX Z 125/250/300	21 - 22
JET 14 EVO 125/200	23 - 24
JET X 125	25 - 26
JOYRIDE S 125/200	27 - 28

ADVENTURE

ADXTG 400	31 - 34
ADX 250/300	35 - 36
ADX 125	37 - 38
SYMNH R 125/300	39 - 40
SYMNH X 125	41 - 42
VF 185	43 - 44
VF 125	45 - 46

HIGH WHEEL

BWT 125	49 - 50
JOYRIDE 16 300	51 - 52
SYMPHONY ST 50/125/200	53 - 54
SYMPHONY 50/125/200	55 - 56
SYMPHONY SR 125	57 - 58
SYMPHONY CARGO 50/125	59 - 60

URBANITY

ECHS 125	63 - 64
MMBCU 125	65 - 66
4MICAEP 125	67 - 68
JET 4 RX 50/125	69 - 70
ORBIT III 50/125	71 - 72

RETRO

FIDDLE 125	75 - 76
FUGUE 125	77 - 78
CLBCU 50/125	79 - 80
FIDDLE 50	81 - 82

CRUISER

TTLBT 508

MAXSYM TL 508

MAXSYM GT 400

CRUISYM 400

CRUISYM 125/300

JOYMAX Z 125/250/300

JET 14 EVO 125/200

JET X 125

JOYRIDE S 125/200



CRUISER


TTLBT

The BT (Bestia) series finale is the supreme touring maxi scooter: TTLBT. Derived from the MAXSYM TL base, the TTLBT is aimed to be a utility sport touring machine.



LED Rear Lights

Distinctive tortoise shell rear lights.

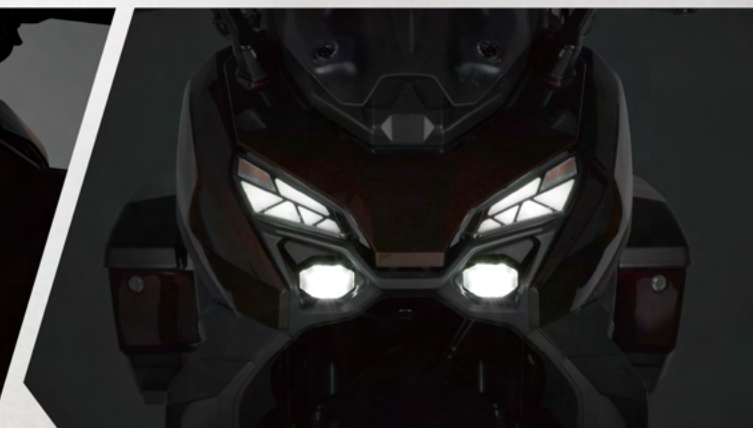

LED Front Lights

Projective headlights integrated with auxiliary cornering lighting.



7" TFT Touch Screen Display

Multifunctional TFT LCD display contains 3 display schemes and wireless Apple CarPlay®, Bluetooth® connectivity.



Motorcycle Stability Control

In addition to the straight-line ABS and TCS, the cornering ABS and cornering TCS are also included, thanks to Bosch 6D IMU.




Ride Modes



Quick Release Panniers



Advanced Smart Key

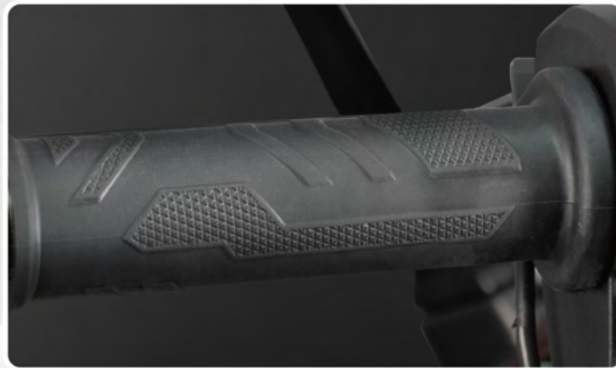

Heated Grips



Cruise Control



Electric Windscreen

MODEL

TTLBT

ENGINE

ENGINE TYPE	2-cylinder, Liquid-cooled
	4-stroke, DOHC, 8-valve

DISPLACEMENT	508 c.c.
BORE x STROKE	Ø 68 x 70 mm
MAXIMUM POWER	33.5 kW / 6,750 rpm
MAXIMUM TORQUE	49.9 Nm / 5,250 rpm
FUEL SYSTEM	E.F.I.
TRANSMISSION	C.V.T.

CHASSIS

FRONT SUSPENSION	Upside-down Fork
REAR SUSPENSION	Single-sided Mono-shock with Multi-link
FRONT BRAKE	Double Disc Ø 275 mm + ABS
REAR BRAKE	Disc 275 mm + ABS
FRONT TYRE	120 / 70 - 15
REAR TYRE	160 / 60 - 15

DIMENSIONS

OVERALL LENGTH	2,235 mm
OVERALL WIDTH	890 mm
OVERALL HEIGHT	1,366 - 1,492 mm
SEAT HEIGHT	780 mm
WHEEL BASE	1,543 mm
FUEL TANK CAPACITY	16 L

FEATURES





FEATURES



MAXSYM GT



MODEL	MAXSYM GT 400
ENGINE	
ENGINE TYPE	1-cylinder, Liquid-cooled 4-stroke, OHC, 4-valve
DISPLACEMENT	399 c.c.
BORE x STROKE	Ø 83 x 73.8 mm
MAXIMUM POWER	25.0 kW / 6,750 rpm
MAXIMUM TORQUE	38.12 Nm / 5,250 rpm
FUEL SYSTEM	E.F.I.
TRANSMISSION	C.V.T.
CHASSIS	
FRONT SUSPENSION	Telescopic Fork
REAR SUSPENSION	Dual Shock
FRONT BRAKE	Disc Ø 288 mm + ABS
REAR BRAKE	Disc Ø 275 mm + ABS
FRONT TYRE	120 / 70-15
REAR TYRE	160 / 60-14
DIMENSIONS	
OVERALL LENGTH	2,230 mm
OVERALL WIDTH	820 mm
OVERALL HEIGHT	1,455 mm
SEAT HEIGHT	780 mm
WHEEL BASE	1,555 mm
FUEL TANK CAPACITY	13 L

FEATURES



CRUISYM 400



MODEL	CRUISYM 400
ENGINE	
ENGINE TYPE	1-cylinder, Liquid-cooled 4-stroke, OHC, 4-valve
DISPLACEMENT	399 c.c.
BORE x STROKE	Ø 83 x 73.8 mm
MAXIMUM POWER	25.0 kW / 6,750 rpm
MAXIMUM TORQUE	37.0 Nm / 5,000 rpm
FUEL SYSTEM	E.F.I.
TRANSMISSION	C.V.T.
CHASSIS	
FRONT SUSPENSION	Telescopic Fork
REAR SUSPENSION	Dual Shock
FRONT BRAKE	Disc Ø 288 mm + ABS
REAR BRAKE	Disc Ø 275 mm + ABS
FRONT TYRE	120 / 70 - 15
REAR TYRE	160 / 60 - 14
DIMENSIONS	
OVERALL LENGTH	2,230 mm
OVERALL WIDTH	820 mm
OVERALL HEIGHT	1,360 mm
SEAT HEIGHT	785 mm
WHEEL BASE	1,552 mm
FUEL TANK CAPACITY	14.5 L
FEATURES	




CRUISYM 125 300



MODEL	CRUISYM 125 / 300	
ENGINE		
ENGINE TYPE	1-cylinder, Liquid-cooled 4-stroke, OHC, 4-valve	
DISPLACEMENT	125 c.c.	278 c.c.
BORE x STROKE	Ø 53 x 56.6 mm	Ø 75 x 63 mm
MAXIMUM POWER	10.5 kW / 8,750 rpm	19.1 kW / 7,500 rpm
MAXIMUM TORQUE	11.3 Nm / 6,750 rpm	26.2 Nm / 6,750 rpm
FUEL SYSTEM	E.F.I.	
TRANSMISSION	C.V.T.	
CHASSIS		
FRONT SUSPENSION	Telescopic Fork	
REAR SUSPENSION	Dual Shock	
FRONT BRAKE	Disc Ø 260 mm + ABS	
REAR BRAKE	Disc Ø 240 mm + ABS	
FRONT TYRE	120 / 70-14	
REAR TYRE	140 / 60-13	
DIMENSIONS		
OVERALL LENGTH	2,175 mm	
OVERALL WIDTH	760 mm	
OVERALL HEIGHT	1,440 mm	
SEAT HEIGHT	760 mm	
WHEEL BASE	1,530 mm	1,550 mm
FUEL TANK CAPACITY	12 L	

FEATURES

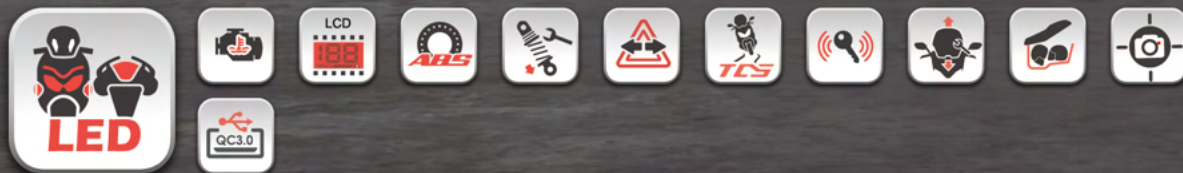






JOYMAX Z

(250/300)

(125)



MODEL		JOYMAX Z 125 / 250 / 300	
ENGINE			
ENGINE TYPE		1-cylinder, Liquid-cooled	
		4-stroke, OHC, 4-valve	
DISPLACEMENT	125 c.c.	249 c.c.	278 c.c.
BORE x STROKE	Ø 53 x 56.6 mm	Ø 71 x 63 mm	Ø 75 x 63 mm
MAXIMUM POWER	10.5 kW / 9,000 rpm	18.1 kW / 8,000 rpm	19.0 kW / 8,000 rpm
MAXIMUM TORQUE	11.3 Nm / 7,000 rpm	24.0 Nm / 6,000 rpm	26.0 Nm / 6,000 rpm
FUEL SYSTEM		E.F.I.	
TRANSMISSION		C.V.T.	
CHASSIS			
FRONT SUSPENSION		Telescopic Fork	
REAR SUSPENSION		Dual Shock	
FRONT BRAKE		Disc Ø 260 mm + ABS	
REAR BRAKE		Disc Ø 240 mm + ABS	
FRONT TYRE		120 / 70 - 14	
REAR TYRE		140 / 60 - 13	
DIMENSIONS			
OVERALL LENGTH	2,190 mm	2,210 mm	
OVERALL WIDTH	750 mm	760 mm	
OVERALL HEIGHT	1,440 mm	1,425 mm	
SEAT HEIGHT	770 mm	755 mm	
WHEEL BASE	1,530 mm	1,535 mm	
FUEL TANK CAPACITY		12 L	
FEATURES			

FEATURES	
	
	
	
	
	

JET 14 EVO



MODEL		JET 14 EVO 125 / 200	
ENGINE			
ENGINE TYPE	1-cylinder, Air-cooled 4-stroke, OHC, 2-valve	1-cylinder, Liquid-cooled 4-stroke, OHC, 4-valve	1-cylinder, Air-cooled 4-stroke, OHC, 2-valve
DISPLACEMENT	125 c.c.		169 c.c.
BORE x STROKE	Ø 52.4 x 57.8 mm		Ø 61 x 57.8 mm
MAXIMUM POWER	8.4 kW / 8,500 rpm	9.3 kW / 8,000 rpm	9.0 kW / 7,500 rpm
MAXIMUM TORQUE	10.3 Nm / 6,500 rpm	11.5 Nm / 6,500 rpm	12.5 Nm / 6,000 rpm
FUEL SYSTEM	E.F.I.		
TRANSMISSION	C.V.T.		
CHASSIS			
FRONT SUSPENSION	Telescopic Fork		
REAR SUSPENSION	Dual Shock		
FRONT BRAKE	Disc Ø 260 mm + CBS	Disc Ø 260 mm + CBS / ABS	Disc Ø 260 mm + ABS
REAR BRAKE	Drum Ø 130 mm + CBS	Disc Ø 220 mm + CBS / ABS	Disc Ø 220 mm + ABS
FRONT TYRE	100 / 90-14		
REAR TYRE	120 / 80-14		
DIMENSIONS			
OVERALL LENGTH	2,015 mm		
OVERALL WIDTH	750 mm		
OVERALL HEIGHT	1,125 mm		
SEAT HEIGHT	790 mm		
WHEEL BASE	1,370 mm		
FUEL TANK CAPACITY	7.2 L		
FEATURES			

FEATURES



JET X



MODEL	JET X 125
ENGINE	
ENGINE TYPE	1-cylinder, Liquid-cooled 4-stroke, OHC, 4-valve
DISPLACEMENT	125 c.c.
BORE x STROKE	Ø 52.4 x 57.8 mm
MAXIMUM POWER	9.3 kw / 8,000 rpm
MAXIMUM TORQUE	11.5 Nm / 6,500 rpm
FUEL SYSTEM	E.F.I.
TRANSMISSION	C.V.T.
CHASSIS	
FRONT SUSPENSION	Telescopic Fork
REAR SUSPENSION	Dual Shock
FRONT BRAKE	Disc Ø 260 mm + CBS / ABS
REAR BRAKE	Disc Ø 220 mm + CBS / ABS
FRONT TYRE	100 / 90-14
REAR TYRE	110 / 80-14
DIMENSIONS	
OVERALL LENGTH	2,000 mm
OVERALL WIDTH	760 mm
OVERALL HEIGHT	1,115 mm
SEAT HEIGHT	780 mm
WHEEL BASE	1,350 mm
FUEL TANK CAPACITY	7.5 L
FEATURES	





MODEL		JOYRIDE S 125 / 200	
ENGINE			
ENGINE TYPE		1-cylinder, Liquid-cooled	
		4-stroke, OHC, 4-valve	
DISPLACEMENT	125 c.c.	175 c.c.	
BORE x STROKE	Ø 53 x 56.6 mm	Ø 61 x 60 mm	
MAXIMUM POWER	10.2 kW / 9,000 rpm	12.5 kW / 8,250 rpm	
MAXIMUM TORQUE	11.2 Nm / 7,000 rpm	15.7 Nm / 6,500 rpm	
FUEL SYSTEM		E.F.I.	
TRANSMISSION		C.V.T.	
CHASSIS			
FRONT SUSPENSION		Telescopic Fork	
REAR SUSPENSION		Dual Shock	
FRONT BRAKE	Disc Ø 240 mm + CBS	Disc Ø 240 mm + ABS	
REAR BRAKE	Disc Ø 200 mm + CBS	Disc Ø 200 mm + ABS	
FRONT TYRE	110 / 90 - 13		
REAR TYRE	130 / 70 - 12		
DIMENSIONS			
OVERALL LENGTH		2,100 mm	
OVERALL WIDTH		760 mm	
OVERALL HEIGHT		1,410 mm	
SEAT HEIGHT		760 mm	
WHEEL BASE		1,440 mm	
FUEL TANK CAPACITY		7.6 L	
FEATURES			

FEATURES



ADVENTURE

ADXTG 400

ADX 250/300

ADX 125

SYMNH R 125/300

SYMNH X 125

VF 185


VF 125



ADVENTURE

ADXTG

Inspired by the ancient predator “saber-toothed tiger”, the ADXTG is set to be able to across variety of terrain. The chassis and ergonomics were designed for multipurpose use and are suitable for reaching farther destinations.




LED Rear Lights

The tight rear end features the double lens iconic M-shape rear light unit.




LED Front Lights

The bionic design concept is applied to the front lighting. The keen eye expression headlamps, tiger fangs position lights and the tiger nose front end deliver strong feline predator image.

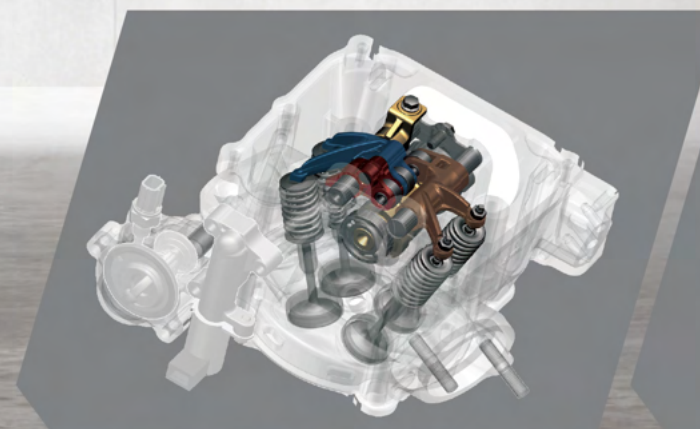

Hyper-VVS

The Hyper-VVS features an EMS controlled variable inlet valve lift and timing mechanism includes high/low speed cams and corresponding rocker arms to pick up advantageous air intake efficiency.

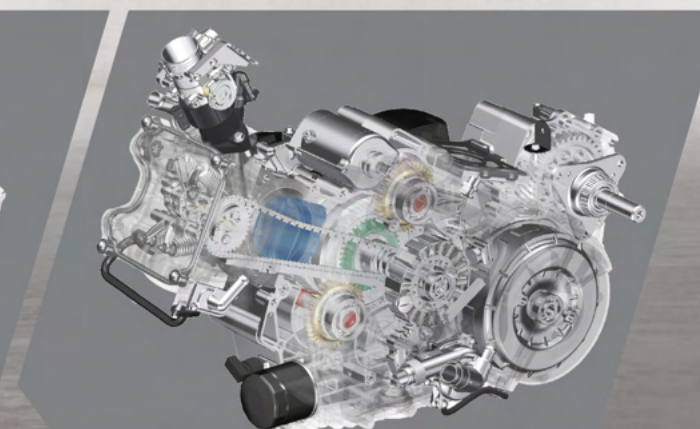

All-New Biaxial Balancer Engine

This feline predator is powered by the brand new 399 c.c. single cylinder engine combines two balance shafts that delivers dominant vibration-killing operation quality.



ADVENTURE



Tool-Free Adjustable Windscreen



41 mm USD Forks



Advanced Smart Key



LCD Display



32 L Luggage Box



Hand Guards

MODEL	ADXTG 400
ENGINE	
ENGINE TYPE	1-cylinder, Liquid-cooled 4-stroke, OHC, 4-valve
DISPLACEMENT	399 c.c.
BORE x STROKE	Ø 83 x 73.8 mm
MAXIMUM POWER	25.7 kW / 7,000 rpm
MAXIMUM TORQUE	37.2 Nm / 5,500 rpm
FUEL SYSTEM	E.F.I.
TRANSMISSION	C.V.T.
CHASSIS	
FRONT SUSPENSION	Upside-down Fork
REAR SUSPENSION	Mono-shock with Multi-link
FRONT BRAKE	Disc Ø 275 mm + ABS
REAR BRAKE	Disc Ø 233 mm + ABS
FRONT TYRE	120 / 70 - 15
REAR TYRE	150 / 70 - 14
DIMENSIONS	
OVERALL LENGTH	2,166 mm
OVERALL WIDTH	920 mm
OVERALL HEIGHT	1,460 mm
SEAT HEIGHT	790 mm
WHEEL BASE	1,535 mm
FUEL TANK CAPACITY	13 L

FEATURES





ADXX 250 300



MODEL	ADX 250 / 300	
ENGINE		
ENGINE TYPE	1-cylinder, Liquid-cooled 4-stroke, OHC, 4-valve	
DISPLACEMENT	249 c.c.	278 c.c.
BORE x STROKE	Ø 71 x 63 mm	Ø 75 x 63 mm
MAXIMUM POWER	18.1 kW / 8,000 rpm	19.0 kW / 8,000 rpm
MAXIMUM TORQUE	24.0 Nm / 6,000 rpm	26.0 Nm / 6,000 rpm
FUEL SYSTEM	E.F.I.	
TRANSMISSION	C.V.T.	
CHASSIS		
FRONT SUSPENSION	Telescopic Fork	
REAR SUSPENSION	Dual Shock	
FRONT BRAKE	Disc Ø 260 mm + ABS	
REAR BRAKE	Disc Ø 240 mm + ABS	
FRONT TYRE	120 / 70 - 15	
REAR TYRE	140 / 70 - 14	
DIMENSIONS		
OVERALL LENGTH	2,185 mm	
OVERALL WIDTH	810 mm	
OVERALL HEIGHT	1,325 mm	
SEAT HEIGHT	790 mm	
WHEEL BASE	1,510 mm	
FUEL TANK CAPACITY	16 L	

FEATURES											
LED	ABS	TFT	Keyless	Engine Stop	ABS	TCS	Keyless	Camera	USB Type C		

ADX 125

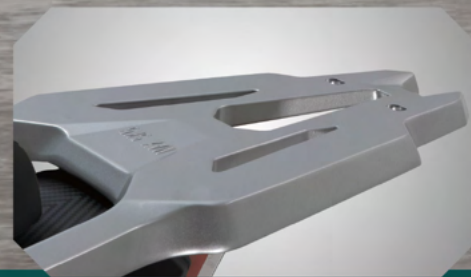

MODEL	ADX 125
ENGINE	
ENGINE TYPE	1-cylinder, Liquid-cooled 4-stroke, OHC, 4-valve
DISPLACEMENT	125 c.c.
BORE x STROKE	Ø 53 x 56.5 mm
MAXIMUM POWER	9.0 kw / 7,500 rpm
MAXIMUM TORQUE	11.5 Nm / 7,000 rpm
FUEL SYSTEM	E.F.I.
TRANSMISSION	C.V.T.
CHASSIS	
FRONT SUSPENSION	Telescopic Fork
REAR SUSPENSION	Single-sided Mono-shock
FRONT BRAKE	Disc Ø 260 mm + ABS
REAR BRAKE	Disc Ø 230 mm + ABS
FRONT TYRE	120 / 70 - 13
REAR TYRE	130 / 70 - 13
DIMENSIONS	
OVERALL LENGTH	1,980 mm
OVERALL WIDTH	780 mm
OVERALL HEIGHT	1,225 mm
SEAT HEIGHT	810 mm
WHEEL BASE	1,390 mm
FUEL TANK CAPACITY	15 L



SYMNH R



MODEL	SYMNH R 125 / 300	
ENGINE		
ENGINE TYPE	1-cylinder, Liquid-cooled 4-stroke, OHC, 4-valve	
DISPLACEMENT	124 c.c.	278 c.c.
BORE x STROKE	Ø 57 x 48 mm	Ø 75 x 63 mm
MAXIMUM POWER	10.3 kW / 9,250 rpm	17.5 kW / 7,500 rpm
MAXIMUM TORQUE	10.8 Nm / 7,500 rpm	22.5 Nm / 7,000 rpm
FUEL SYSTEM	E.F.I.	
TRANSMISSION	6-speed	
CHASSIS		
FRONT SUSPENSION	Telescopic Fork	
REAR SUSPENSION	Mono Shock	
FRONT BRAKE	Disc Ø 288 mm + ABS	
REAR BRAKE	Disc Ø 222 mm + ABS	
FRONT TYRE	100 / 90-19	
REAR TYRE	130 / 80-17	
DIMENSIONS		
OVERALL LENGTH	2,080 mm	
OVERALL WIDTH	970 mm	
OVERALL HEIGHT	1,335 mm	
SEAT HEIGHT	815 mm	
WHEEL BASE	1,405 mm	
FUEL TANK CAPACITY	14 L	
FEATURES		



SYMNH X



MODEL	SYMNH X 125
ENGINE	
ENGINE TYPE	1-cylinder, Liquid-cooled 4-stroke, OHC, 4-valve
DISPLACEMENT	125 c.c.
BORE x STROKE	Ø 57 x 48 mm
MAXIMUM POWER	10.3 kW / 9,250 rpm
MAXIMUM TORQUE	10.8 Nm / 7,500 rpm
FUEL SYSTEM	E.F.I.
TRANSMISSION	6-speed
CHASSIS	
FRONT SUSPENSION	Telescopic Fork
REAR SUSPENSION	Mono Shock
FRONT BRAKE	Disc Ø 288 mm + ABS
REAR BRAKE	Disc Ø 222 mm + ABS
FRONT TYRE	110 / 70 - 17
REAR TYRE	130 / 70 - 17
DIMENSIONS	
OVERALL LENGTH	2,020 mm
OVERALL WIDTH	745 mm
OVERALL HEIGHT	1,075 mm
SEAT HEIGHT	780 mm
WHEEL BASE	1,380 mm
FUEL TANK CAPACITY	14 L
FEATURES	



VF 185



MODEL	VF 185
ENGINE	
ENGINE TYPE	1-cylinder, Liquid-cooled
	4-stroke, OHC, 4-valve
DISPLACEMENT	183 c.c.
BORE x STROKE	Ø 63.5 x 57.8 mm
MAXIMUM POWER	14.7 kW / 9,000 rpm
MAXIMUM TORQUE	17.5 Nm / 7,500 rpm
FUEL SYSTEM	E.F.I.
TRANSMISSION	6-speed
CHASSIS	
FRONT SUSPENSION	Telescopic Fork
REAR SUSPENSION	Mono Shock
FRONT BRAKE	Disc Ø 250 mm + ABS
REAR BRAKE	Disc Ø 200 mm + ABS
FRONT TYRE	90 / 80-17
REAR TYRE	120 / 70-17
DIMENSIONS	
OVERALL LENGTH	2,000mm
OVERALL WIDTH	740 mm
OVERALL HEIGHT	1,150 mm
SEAT HEIGHT	800 mm
WHEEL BASE	1,305 mm
FUEL TANK CAPACITY	7 L
FEATURES	



VF 125



MODEL	VF 125
ENGINE	
ENGINE TYPE	1-cylinder, Air-cooled 4-stroke, OHC, 2-valve
DISPLACEMENT	125 c.c.
BORE x STROKE	Ø 52.4 x 57.8 mm
MAXIMUM POWER	7.1 kW / 8,500 rpm
MAXIMUM TORQUE	8.7 Nm / 7,000 rpm
FUEL SYSTEM	E.F.I.
TRANSMISSION	4-speed
CHASSIS	
FRONT SUSPENSION	Telescopic Fork
REAR SUSPENSION	Dual Shock
FRONT BRAKE	Disc Ø 220 mm + CBS
REAR BRAKE	Disc Ø 202 mm + CBS
FRONT TYRE	70 / 90-17
REAR TYRE	120 / 70-17
DIMENSIONS	
OVERALL LENGTH	1,965 mm
OVERALL WIDTH	720 mm
OVERALL HEIGHT	1,125 mm
SEAT HEIGHT	805 mm
WHEEL BASE	1,262 mm
FUEL TANK CAPACITY	3.6 L
FEATURES	



HIGH WHEEL

BWT 125

JOYRIDE 16 300

SYMPHONY ST 50/125/200

SYMPHONY 50/125/200

SYMPHONY SR 125

SYMPHONY CARGO 50/125



HIGH WHEEL

BWT




MODEL	BWT 125
ENGINE	
ENGINE TYPE	1-cylinder, Air-cooled 4-stroke, OHC, 2-valve
DISPLACEMENT	125 c.c.
BORE x STROKE	Ø 52.4 x 57.7 mm
MAXIMUM POWER	7.1 kW / 8,000 rpm
MAXIMUM TORQUE	10.7 Nm / 5,000 rpm
FUEL SYSTEM	E.F.I.
TRANSMISSION	C.V.T.
CHASSIS	
FRONT SUSPENSION	Telescopic Fork
REAR SUSPENSION	Single Shock
FRONT BRAKE	Disc Ø 233 mm + CBS
REAR BRAKE	Drum Ø 130 mm + CBS
FRONT TYRE	80 / 90 - 16
REAR TYRE	100 / 80 - 14
DIMENSIONS	
OVERALL LENGTH	1,973 mm
OVERALL WIDTH	708 mm
OVERALL HEIGHT	1,161 mm
SEAT HEIGHT	785 mm
WHEEL BASE	1,310 mm
FUEL TANK CAPACITY	5 L



HIGH WHEEL

JOYRIDE 16



MODEL	JOYRIDE 16 300
ENGINE	
ENGINE TYPE	1-cylinder, Liquid-cooled 4-stroke, OHC, 4-valve
DISPLACEMENT	278 c.c.
BORE x STROKE	Ø 75 x 63 mm
MAXIMUM POWER	19.0 kW / 8,000 rpm
MAXIMUM TORQUE	26.0 Nm / 6,000 rpm
FUEL SYSTEM	E.F.I.
TRANSMISSION	C.V.T.
CHASSIS	
FRONT SUSPENSION	Telescopic Fork
REAR SUSPENSION	Dual Shock
FRONT BRAKE	Disc Ø 260 mm + ABS
REAR BRAKE	Disc Ø 240 mm + ABS
FRONT TYRE	110 / 70 - 16 or 120 / 70 - 15
REAR TYRE	140 / 70 - 14
DIMENSIONS	
OVERALL LENGTH	2,215 mm
OVERALL WIDTH	765 mm
OVERALL HEIGHT	1,380 mm
SEAT HEIGHT	780 mm
WHEEL BASE	1,490 mm
FUEL TANK CAPACITY	11.5 L
FEATURES	



Symphony *ST*



MODEL		SYMPHONY ST 50 / 125 / 200		
ENGINE				
ENGINE TYPE		1-cylinder, Air-cooled 4-stroke, OHC, 2-valve	1-cylinder, Liquid-cooled 4-stroke, OHC, 4-valve	1-cylinder, Air-cooled 4-stroke, OHC, 2-valve
DISPLACEMENT		49 c.c.	125 c.c.	
BORE x STROKE		Ø 37 x 46 mm	Ø 52.4 x 57.8 mm	
MAXIMUM POWER		2.2 kW / 8,000 rpm	8.4 kW / 8,500 rpm	9.3 kW / 8,000 rpm
MAXIMUM TORQUE		3.0 Nm / 6,000 rpm	10.3 Nm / 6,500 rpm	11.5 Nm / 6,500 rpm
FUEL SYSTEM		E.F.I.		
TRANSMISSION		C.V.T.		
CHASSIS				
FRONT SUSPENSION		Telescopic Fork		
REAR SUSPENSION		Dual Shock		
FRONT BRAKE		Disc Ø 260 mm	Disc Ø 260 mm + CBS	Disc Ø 260 mm + ABS
REAR BRAKE		Disc Ø 240 mm	Disc Ø 220 mm + CBS	Disc Ø 220 mm + ABS
FRONT TYRE		110 / 70-16		
REAR TYRE		110 / 70 - 16	120 / 80-14	
DIMENSIONS				
OVERALL LENGTH		2,060 mm	2,070 mm	
OVERALL WIDTH		735 mm		
OVERALL HEIGHT		1,200 mm	1,190 mm	
SEAT HEIGHT		800 mm		
WHEEL BASE		1,350 mm	1,365 mm	1,385 mm
FUEL TANK CAPACITY		7 L		
FEATURES				



Symphony



MODEL		SYMPHONY 50 / 125 / 200	
ENGINE			
ENGINE TYPE		1-cylinder, Air-cooled	
		4-stroke, OHC, 2-valve	
DISPLACEMENT	49 c.c.	125 c.c.	169 c.c.
BORE x STROKE	Ø 37 x 46 mm	Ø 52.4 x 57.8 mm	Ø 61 x 57.8 mm
MAXIMUM POWER	2.2 kW / 8,000 rpm	8.4 kW / 8,500 rpm	9.0 kW / 7,500 rpm
MAXIMUM TORQUE	3.0 Nm / 6,000 rpm	10.3 Nm / 6,500 rpm	12.5 Nm / 6,000 rpm
FUEL SYSTEM		E.F.I.	
TRANSMISSION		C.V.T.	
CHASSIS			
FRONT SUSPENSION		Telescopic Fork	
REAR SUSPENSION		Dual Shock	
FRONT BRAKE	Disc Ø 260 mm	Disc Ø 260 mm + CBS	Disc Ø 260 mm + ABS
REAR BRAKE	Disc Ø 240 mm	Disc Ø 240 mm + CBS	Disc Ø 240 mm + ABS
FRONT TYRE		110 / 70-16	
REAR TYRE		110 / 70-16	
DIMENSIONS			
OVERALL LENGTH		1,980 mm	
OVERALL WIDTH		685 mm	
OVERALL HEIGHT		1,214 mm	
SEAT HEIGHT		790 mm	
WHEEL BASE	1,330 mm	1,360 mm	
FUEL TANK CAPACITY		5.2 L	
FEATURES			

FEATURES

LED

LCD

ABS

Maintenance-free

QC2.0



Symphony SR



MODEL	SYMPHONY SR 125
ENGINE	
ENGINE TYPE	1-cylinder, Air-cooled 4-stroke, OHC, 2-valve
DISPLACEMENT	125 c.c.
BORE x STROKE	Ø 52.4 x 57.8 mm
MAXIMUM POWER	8.4 kW / 8,500 rpm
MAXIMUM TORQUE	10.3 Nm / 6,500 rpm
FUEL SYSTEM	E.F.I.
TRANSMISSION	C.V.T.
CHASSIS	
FRONT SUSPENSION	Telescopic Fork
REAR SUSPENSION	Dual Shock
FRONT BRAKE	Disc Ø 260mm + CBS / ABS
REAR BRAKE	Disc Ø 240mm + CBS / ABS
FRONT TYRE	110 / 70-16
REAR TYRE	110 / 70-16
DIMENSIONS	
OVERALL LENGTH	1,990 mm
OVERALL WIDTH	690 mm
OVERALL HEIGHT	1,190 mm
SEAT HEIGHT	790 mm
WHEEL BASE	1,355 mm
FUEL TANK CAPACITY	5.4 L
FEATURES	





MODEL		SYMPHONY CARGO 50 / 125	
ENGINE			
ENGINE TYPE		1-cylinder, Air-cooled	
		4-stroke, OHC, 2-valve	
DISPLACEMENT	49 c.c.	125 c.c.	
BORE x STROKE	Ø 37 x 46 mm	Ø 52.4 x 57.8 mm	
MAXIMUM POWER	2.2 kW / 8,000 rpm	8.4 kW / 8,500 rpm	
MAXIMUM TORQUE	3.0 Nm / 6,000 rpm	10.3 Nm / 6,500 rpm	
FUEL SYSTEM		E.F.I.	
TRANSMISSION		C.V.T.	
CHASSIS			
FRONT SUSPENSION		Telescopic Fork	
REAR SUSPENSION		Dual Shock	
FRONT BRAKE	Disc Ø 226 mm	Disc Ø 260 mm + CBS	
REAR BRAKE	Drum Ø 130 mm	Disc Ø 240 mm + CBS	
FRONT TYRE	90 / 80-16	110 / 70-16	
REAR TYRE	90 / 80-16	110 / 70-16	
DIMENSIONS			
OVERALL LENGTH		2,000 mm	
OVERALL WIDTH		690 mm	
OVERALL HEIGHT		1,125 mm	
SEAT HEIGHT	780 mm	790 mm	
WHEEL BASE		1,330 mm	
FUEL TANK CAPACITY		8 L	
FEATURES			



URBANITY

ECHS 125

MMBCU 125

4MICAEP 125

JET 4 RX 50/125

ORBIT III 50/125



URBANITY

ECHS




MODEL	ECHS 125
ENGINE	
ENGINE TYPE	1-cylinder, Air-cooled 4-stroke, OHC, 2-valve
DISPLACEMENT	125 c.c.
BORE x STROKE	Ø 52.4 x 57.9 mm
MAXIMUM POWER	7.1 kW / 7,000 rpm
MAXIMUM TORQUE	10.4 Nm / 5,500 rpm
FUEL SYSTEM	E.F.I.
TRANSMISSION	C.V.T.
CHASSIS	
FRONT SUSPENSION	Telescopic Fork
REAR SUSPENSION	Dual Shock
FRONT BRAKE	Disc Ø 226 mm + CBS / ABS
REAR BRAKE	Drum Ø 130 mm + CBS
FRONT TYRE	90 / 90 - 12
REAR TYRE	100 / 90 - 10
DIMENSIONS	
OVERALL LENGTH	1,915 mm
OVERALL WIDTH	690 mm
OVERALL HEIGHT	1,085 mm
SEAT HEIGHT	750 mm
WHEEL BASE	1,255 mm
FUEL TANK CAPACITY	6.8 L
FEATURES	



mmbcu



MODEL	MMBCU 125
ENGINE	
ENGINE TYPE	1-cylinder, Liquid-cooled 4-stroke, OHC, 4-valve
DISPLACEMENT	125 c.c.
BORE x STROKE	Ø 53 x 56.5 mm
MAXIMUM POWER	9.0 kW / 7,500 rpm
MAXIMUM TORQUE	11.5 Nm / 7,000 rpm
FUEL SYSTEM	E.F.I.
TRANSMISSION	C.V.T.
CHASSIS	
FRONT SUSPENSION	Telescopic Fork
REAR SUSPENSION	Single-sided Mono-shock
FRONT BRAKE	Disc Ø 260 mm + ABS
REAR BRAKE	Disc Ø 233 mm + ABS
FRONT TYRE	120 / 70 - 13
REAR TYRE	130 / 70 - 13
DIMENSIONS	
OVERALL LENGTH	1,995 mm
OVERALL WIDTH	760 mm
OVERALL HEIGHT	1,125 mm
SEAT HEIGHT	810 mm
WHEEL BASE	1,385 mm
FUEL TANK CAPACITY	7.3 L
FEATURES	

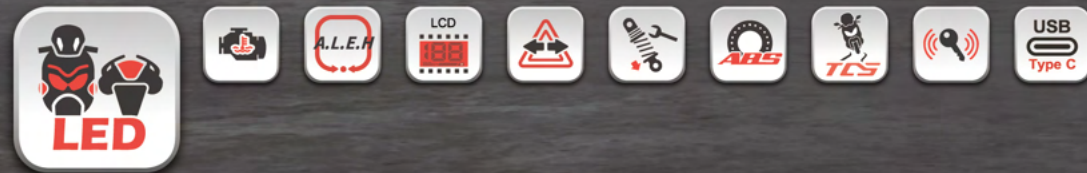


4MICAEP



MODEL	4MICAEP 125
ENGINE	
ENGINE TYPE	1-cylinder, Air-cooled 4-stroke, OHC, 2-valve
DISPLACEMENT	125 c.c.
BORE x STROKE	Ø 52.4 x 57.8 mm
MAXIMUM POWER	8.4 kW / 8,500 rpm
MAXIMUM TORQUE	10.3 Nm / 6,500 rpm
FUEL SYSTEM	E.F.I.
TRANSMISSION	C.V.T.
CHASSIS	
FRONT SUSPENSION	Telescopic Fork
REAR SUSPENSION	Dual Shock
FRONT BRAKE	Disc Ø 226 mm + CBS
REAR BRAKE	Disc Ø 220 mm + CBS
FRONT TYRE	110 / 70-12
REAR TYRE	120 / 70-12
DIMENSIONS	
OVERALL LENGTH	1,930 mm
OVERALL WIDTH	690 mm
OVERALL HEIGHT	1,060 mm
SEAT HEIGHT	775
WHEEL BASE	1,405 mm
FUEL TANK CAPACITY	8 L
FEATURES	



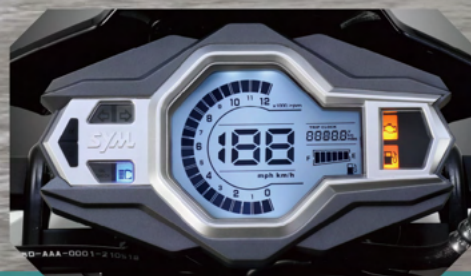

MODEL		JET 4 RX 50 / 125	
ENGINE			
ENGINE TYPE		1-cylinder, Air-cooled	
		4-stroke, OHC, 2-valve	
DISPLACEMENT	49 c.c.	125 c.c.	
BORE x STROKE	Ø 37 x 46 mm	Ø 52.4 x 57.8 mm	
MAXIMUM POWER	2.2 kW / 8,000 rpm	8.4 kW / 8,500 rpm	
MAXIMUM TORQUE	3.0 Nm / 6,000 rpm	10.3 Nm / 6,500 rpm	
FUEL SYSTEM		E.F.I.	
TRANSMISSION		C.V.T.	
CHASSIS			
FRONT SUSPENSION		Telescopic Fork	
REAR SUSPENSION		Single Shock	
FRONT BRAKE	Disc Ø 226 mm	Disc Ø 226 mm + CBS	
REAR BRAKE	Drum Ø 110 mm	Drum Ø 130 mm + CBS	
FRONT TYRE	110 / 70-12		
REAR TYRE	120 / 70-12		
DIMENSIONS			
OVERALL LENGTH		1,900 mm	
OVERALL WIDTH		745 mm	
OVERALL HEIGHT		1,110 mm	
SEAT HEIGHT		785 mm	
WHEEL BASE	1,290 mm	1,320 mm	
FUEL TANK CAPACITY		6.2 L	
FEATURES			

FEATURES





MODEL		ORBIT III 50 / 125	
ENGINE			
ENGINE TYPE		1-cylinder, Air-cooled	
		4-stroke, OHC, 2-valve	
DISPLACEMENT	49 c.c.	125 c.c.	
BORE x STROKE	Ø 37 x 46 mm	Ø 52.4 x 57.8 mm	
MAXIMUM POWER	2.2 kW / 8,000 rpm	8.4 kW / 8,500 rpm	
MAXIMUM TORQUE	3.0 Nm / 6,000 rpm	10.3 Nm / 6,500 rpm	
FUEL SYSTEM		E.F.I.	
TRANSMISSION		C.V.T.	
CHASSIS			
FRONT SUSPENSION		Telescopic Fork	
REAR SUSPENSION		Single Shock	
FRONT BRAKE	Disc Ø 226 mm	Disc Ø 226 mm + CBS	
REAR BRAKE	Drum Ø 110 mm	Drum Ø 130 mm + CBS	
FRONT TYRE		110 / 70-12	
REAR TYRE		120 / 70-12	
DIMENSIONS			
OVERALL LENGTH	1,915 mm	1,900 mm	
OVERALL WIDTH	680 mm	682 mm	
OVERALL HEIGHT	1,125 mm	1,120 mm	
SEAT HEIGHT		785 mm	
WHEEL BASE	1,290 mm	1,320 mm	
FUEL TANK CAPACITY		6.2 L	
FEATURES			

FEATURES





RETRO

FIDDLE 125

FUGUE 125


CLBCU 50/125

FIDDLE 50



RETRO


Fiddle 125



MODEL	NEW FIDDLE 125
ENGINE	
ENGINE TYPE	1-cylinder, Liquid-cooled 4-stroke, OHC, 4-valve
DISPLACEMENT	125 c.c.
BORE x STROKE	Ø 53 x 56.5 mm
MAXIMUM POWER	9.0 kW / 8,500 rpm
MAXIMUM TORQUE	11.0 Nm / 6,500 rpm
FUEL SYSTEM	E.F.I.
TRANSMISSION	C.V.T.
CHASSIS	
FRONT SUSPENSION	Telescopic Fork
REAR SUSPENSION	Dual Shock
FRONT BRAKE	Disc Ø 226 mm + CBS / ABS
REAR BRAKE	Disc Ø 220 mm + CBS / ABS
FRONT TYRE	110 / 70 - 12
REAR TYRE	120 / 70 - 12
DIMENSIONS	
OVERALL LENGTH	1,850 mm
OVERALL WIDTH	670 mm
OVERALL HEIGHT	1,100 mm
SEAT HEIGHT	780 mm
WHEEL BASE	1,290 mm
FUEL TANK CAPACITY	7 L
FEATURES	



Fugue



MODEL	FUGUE 125
ENGINE	
ENGINE TYPE	1-cylinder, Air-cooled 4-stroke, OHC, 2-valve
DISPLACEMENT	125 c.c.
BORE x STROKE	Ø 52.4 x 57.8 mm
MAXIMUM POWER	8.0 kW / 8,250 rpm
MAXIMUM TORQUE	10.0 Nm / 6,250 rpm
FUEL SYSTEM	E.F.I.
TRANSMISSION	C.V.T.
CHASSIS	
FRONT SUSPENSION	Telescopic Fork
REAR SUSPENSION	Single Shock
FRONT BRAKE	Disc Ø 226 mm + CBS / ABS
REAR BRAKE	Disc Ø 220 mm + CBS / ABS
FRONT TYRE	110 / 70 - 12
REAR TYRE	120 / 70 - 12
DIMENSIONS	
OVERALL LENGTH	1,965 mm
OVERALL WIDTH	675mm
OVERALL HEIGHT	1,185 mm
SEAT HEIGHT	770 mm
WHEEL BASE	1,305 mm
FUEL TANK CAPACITY	5.7 L
FEATURES	




CLBCU



MODEL	CLBCU 50 / 125	
ENGINE		
ENGINE TYPE	1-cylinder, Air-cooled 4-stroke, OHC, 2-valve	
DISPLACEMENT	49 c.c.	125 c.c.
BORE x STROKE	Ø 37 x 46 mm	Ø 52.4 x 57.9mm
MAXIMUM POWER	2.2 kW / 7,000 rpm	7.1 kW / 7,000 rpm
MAXIMUM TORQUE	3.0 Nm / 6,000 rpm	10.4 Nm / 5,500 rpm
FUEL SYSTEM	E.F.I.	
TRANSMISSION	C.V.T.	
CHASSIS		
FRONT SUSPENSION	Telescopic Fork	
REAR SUSPENSION	Single Shock	
FRONT BRAKE	Disc Ø 205 mm	Disc Ø 205 mm + CBS
REAR BRAKE	Drum Ø 110 mm	Drum Ø 130 mm + CBS
FRONT TYRE	90 / 90 - 10	
REAR TYRE	90 / 90 - 10	100 / 80 - 10
DIMENSIONS		
OVERALL LENGTH	1,790 mm	1,780 mm
OVERALL WIDTH	630mm	
OVERALL HEIGHT	1,065 mm	1,060 mm
SEAT HEIGHT	745 mm	
WHEEL BASE	1,250 mm	
FUEL TANK CAPACITY	6.5 L	
FEATURES		



Fiddle 50



MODEL	FIDDLE 50
ENGINE	
ENGINE TYPE	1-cylinder, Air-cooled 4-stroke, OHC, 2-valve
DISPLACEMENT	49 c.c.
BORE x STROKE	Ø 37 x 46 mm
MAXIMUM POWER	2.2 kW / 8,000 rpm
MAXIMUM TORQUE	3.0 Nm / 6,000 rpm
FUEL SYSTEM	E.F.I.
TRANSMISSION	C.V.T.
CHASSIS	
FRONT SUSPENSION	Telescopic Fork
REAR SUSPENSION	Dual Shock
FRONT BRAKE	Disc Ø 226 mm
REAR BRAKE	Drum Ø 110 mm
FRONT TYRE	110 / 70-12
REAR TYRE	120 / 70-12
DIMENSIONS	
OVERALL LENGTH	1,880 mm
OVERALL WIDTH	675 mm
OVERALL HEIGHT	1,115 mm
SEAT HEIGHT	780 mm
WHEEL BASE	1,295 mm
FUEL TANK CAPACITY	6.2 L
FEATURES	





TEST

START YOUR MILES

